
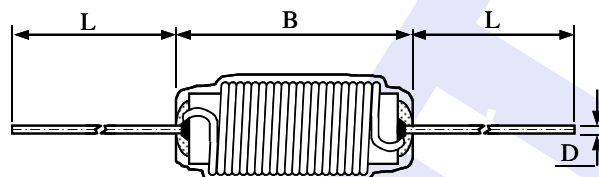


CUSTOMER:		REF NO :	S02771
DESCRIPTION:	AL3010-100K	VERSION:A	PAGE: 1/1

SPECIFICATION

DIMENSION: mm



A	5.0 max
B	15.0 max
D	Ø0.5±0.1
L	20.0 min

ELECTRONIC CHARACTERISTICS

MATERIALS

INDUCTANCE: 10.0μH±10%
(1KHz/0.25V CH-100LCR)

CORE: M9A RWW 3×10

DC RESIST: 0.22Ωmax
(CH-502AC at 25°C)

WIRE: 2UEW Ø0.21mm

DC CURRENT: 3.0A

TURNS: 32Ts (Ref)

TUBE: Black UL

APP	CHK	DRG

SAMPLE NO.	
MATSUTA NO.	61-1010031-2
SPEC. NO.	EN11951
ISSUE DATE.	2011/10/23

MATSUTA CO.,LTD.

Flat 15, 10/F, Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong.

Tel: (852) 2796 6693

Fax: (852) 2796 3530, 2754 5674

E-mail: matsuta@matsuta.com.hk

Web site: <http://www.matsuta.com>