
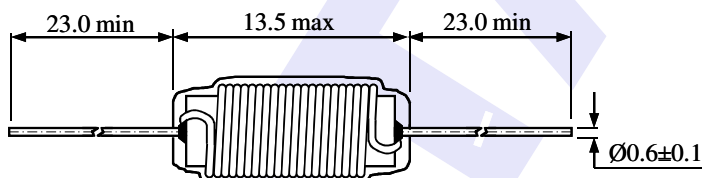


CUSTOMER:	REF NO : S01962		
DESCRIPTION:	AL3010-210K	FORMAT: A	PAGE : 1/1

SPECIFICATION

DIMENSION: mm



ELECTRONIC CHARACTERISTICS

INDUCTANCE: 21.0 μ H $\pm$ 10%
(1KHz/0.25V CH-100LCR)

DC RESIST: 0.55 Ω max
(CH-502AC at 25°C)

DC CURRENT: 0.5A

MATERIALS

CORE: H6 RWW 3 $\times$ 10

WIRE: 2UEW Ø0.15mm

TURNS: 41Ts

TUBE: Black UL

APP	CHK	DRG

SAMPLE NO.	
MATSUTA NO.	61-1021031
SPEC. NO.	EN10832
ISSUE DATE.	16/12/2011

MATSUTA CO.,LTD.

Flat 15, 10/F, Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong.

Tel: (852) 2796 6693

Fax: (852) 2796 3530, 2754 5674

E-mail: matsuta@matsuta.com.hk

Web site: <http://www.matsuta.com>