




CUSTOMER:	REF NO :		
DESCRIPTION:	UU10.5 LINE FILTER	VERSION:B	PAGE: 1/2

SPECIFICATION

Compliant RoHS


I .PHYSICAL DIMENSIONS (Unit:mm)

A	B	C	D	L	P1	P2
19.0max	17.0max	21.5 max	Ø0.7±0.1	3.5±1.0	13.0±0.5	10.0±0.5

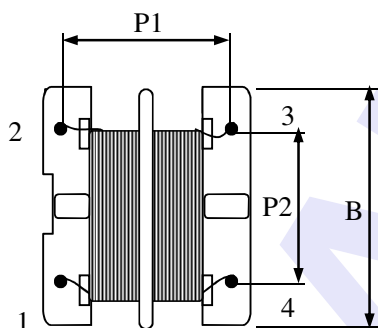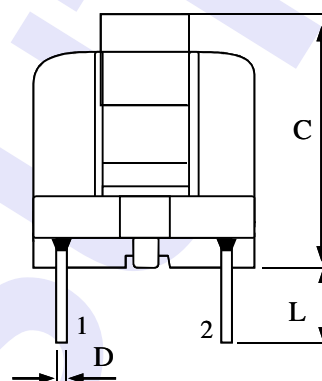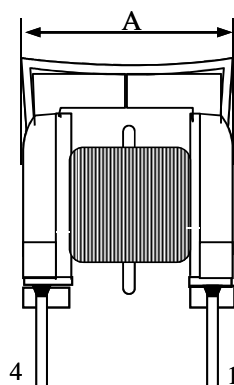

BOTTOM VIEW

II . WINDING DIAGRAM



Note: ● Winding start

APP	CHK	DRG

SAMPLE NO.	
MATSUTA NO.	63-161016229Q
SPEC. NO.	TR16229
ISSUE DATE.	2011/03/10

MATSUTA CO.,LTD.

Flat 15, 10/F, Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong.

Tel: (852) 2796 6693

Fax: (852) 2796 3530, 2754 5674

E-mail: matsuta@matsuta.com.hk

Web site: <http://www.matsuta.com>

CUSTOMER:	REF NO:		
DESCRIPTION:	UU10.5 LINE FILTER	VERSION: B	PAGE: 2/2

SPECIFICATION

Compliant RoHS

III. ELECTRICAL PERFORMANCE

C.D.	Ts (REF)	WIRW (UEW)	START	END	INDUCTANCE	DC RESIST
N1	119	Ø0.28mm	1	2	27mH min	1.5 Ω max
N2	119	Ø0.28mm	4	3	27mH min	1.5 Ω max
N O T E	1. Inductance measured by CH-100LCR (at 1KHz/0.25V).					
	2. DC Resist measured by CH-502AC (at 25°C).					
	3. Rated current:0.45A.					
	4. Rated votage:250V.					
	5. HI-POT test:Coil to Coil 0.7KV/AC/3mA for 3 seconds. Coil to Core0.7KV/AC/3mA for 3 seconds.					

IV. MATERIALS LIST:

NO	ITEM	MATERIALS	MANUFACTURER	UL FILE NO
1	BOBBIN	UU10.5 T375J	JIE DA CHENG ELECTRONICS CO.,LTD.	E59481(S)
2	CLIP	SUS-301 UU10.5	CHUANG SHUN ELECTRONIC	N/A
3	CORE	A10 UU10.5 OR EQUIVALENT	ACME OR EQUIVALENT	N/A
4	WIRE	UEW 130°C OR EQUIVALENT	FENG CHING METAL CORP OR EQUIVALENT	E172395
5	VARNISH	1032BOH	QUALIPOLY CHEMICAL CORP	E213437

APP	CHK	DRG

SAMPLE NO.	
MATSUTA NO.	63-161016229Q
SPEC. NO.	TR16229
ISSUE DATE.	2011/03/10

MATSUTA CO.,LTD.

Flat 15, 10/F, Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong.

Tel: (852) 2796 6693

Fax: (852) 2796 3530, 2754 5674

E-mail: matsuta@matsuta.com.hk

Web site: <http://www.matsuta.com>