




CUSTOMER:	REF NO :XMS0049		
DESCRIPTION:	UU9.8 LINE FILTER	VERSION:A	PAGE:1/2

SPECIFICATION

Compliant RoHS


I .PHYSICAL DIMENSIONS (Unit:mm)

A	B	C	D	L	P1	P2
17 max	12 max	17.5 max	∅0.6± 0.1	3.5± 1.0	8.0± 0.5	7.0± 0.5

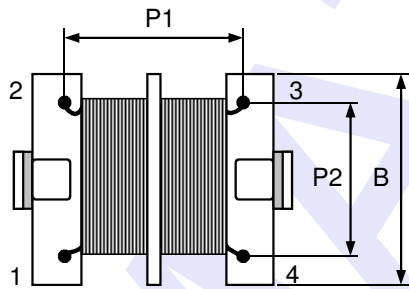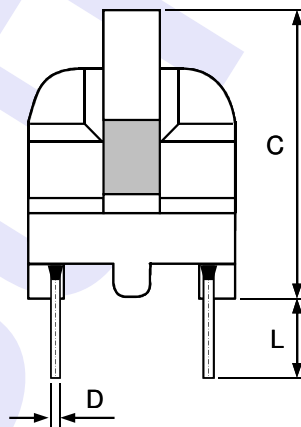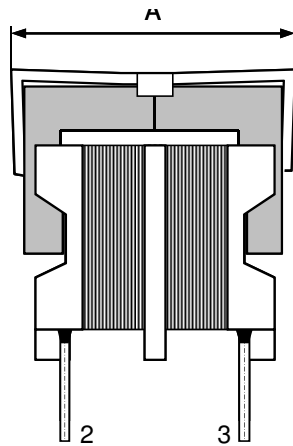

Bottom View

II .WINDING DIAGRAM



Note: ● Winding start

APP	CHK	DRG
钟明德	王成锋	王梦珍

SAMPLE NO.	
MATSUTA NO.	63-169811801A
SPEC. NO.	EN11801A
ISSUE DATE.	2012-3-27

MATSUTA CO.,LTD.

Flat 15, 10/F, Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong.

Tel: (852) 2796 6693

Fax: (852) 2796 3530, 2754 5674

E-mail: matsuta@matsuta.com.hk

Web site: <http://www.matsuta.com>

CUSTOMER:	REF NO :XMS0049		
DESCRIPTION:	UU9.8 LINE FILTER	VERSION :A	PAGE:2/2

SPECIFICATION

Compliant RoHS

III.ELECTRICAL PERFORMANCE & CONSTRUCTION

C.D.	START	END	N(Ts)	WIRE (UEW)	INDUCTANCE	DC RESIST
N1	1	2	90 Ref	∅0.25mm	10mH min	1.1 Ω max
N2	4	3	90 Ref	∅0.25mm	10mH min	1.1 Ω max
N O T E	1. Inductance measured by CH-100LCR (1KHz/0.25V).					
	2. DC Resist measured by CH-502AC (at 25℃).					
	3. RATED VOLTAGE: 250V AC					
	4. PRIMARY CURRENT: 0.5A AC					
	5. HI-POT Test: Coil to Coil 1000V/AC/3mA for 60 Seconds. Coil to Core 1000V/AC/3mA for 60 Seconds.					

IV、 MATERIALS LIST:

NO	ITEM	MATERIALS	MANUFACTURER	UL FILE NO
1	BOBBIN	UU9.8 PHENOLIC T375J 94V-0	CHANG CHUN PLASTICS CO.,LTD.	E59481(S)
2	CORE	A07 UU9.8 OR EQUIVALENT	ACME CO.,LTD. OR EQUIVALENT	N/A
3	WIRE	UEW 130℃	FENG CHING METAL CORP OR EQUIVALENT	E172395
4	CLIP	UU9.8	CHUANG SHUN ELECTRONIC	N/A
5	VARNISH	1032BIH	QUALIPOLY CHEMICAL CORP	E213437
6	SOLDER	SMD1	NIHON GENMA	N/A

APP	CHK	DRG	SAMPLE NO.	
钟明德	王成锋	王梦珍	MATSUTA NO.	63-169811801A
			SPEC. NO.	EN11801A
			ISSUE DATE.	2012-3-27

MATSUTA CO.,LTD.

Flat 15, 10/F, Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong.

Tel: (852) 2796 6693

Fax: (852) 2796 3530, 2754 5674

E-mail: matsuta@matsuta.com.hk

Web site: <http://www.matsuta.com>